

EQ-10HR


High Repetition Rate EUV Light Source



Electrodeless Z-Pinch™ 10 kHz EUV Source

The EQ-10HR is a compact, easy-to-use, reliable, and cost-effective EUV light source based on Energetiq's proven Electrodeless Z-Pinch™ technology using Xenon gas. The EQ-10HR high repetition rate EUV source is uniquely suited for metrology and research applications where simulation of high volume manufacturing (HVM) is required.

The Energetiq EQ-10HR EUV source is a stand-alone system ready to be integrated into a process tool. It includes the Electrodeless Z-pinch™ source assembly, maglev vacuum pumping subsystem, gas delivery subsystem, power delivery subsystem, and control electronics.

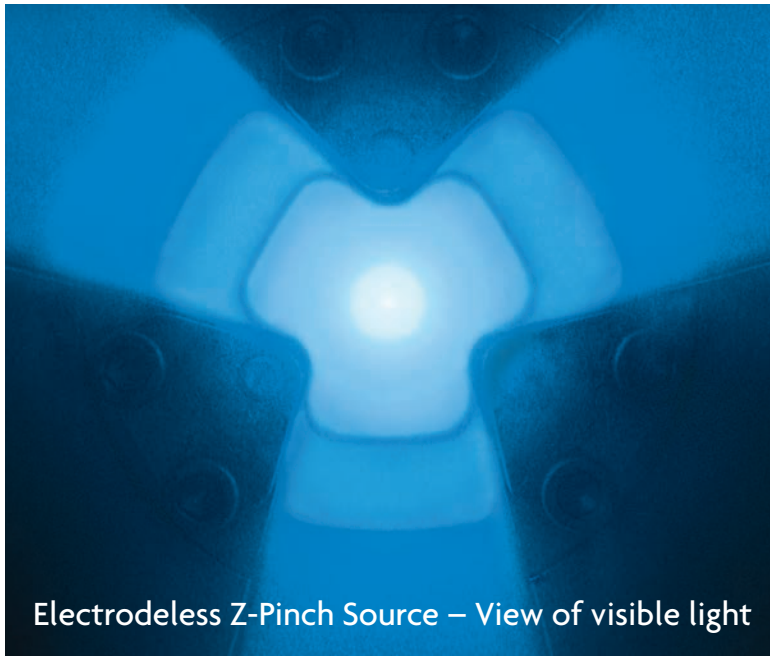

Electrodeless Z-Pinch Source – View of visible light

Features and Benefits

- Performance
 - 10 kHz pulse rate
 - Small plasma size
 - Low debris
- Low Cost of Ownership
 - Low Xenon flow rate
 - Minimized consumable cost
 - Small footprint
- Proven Reliability
 - Patented Electrodeless Z-Pinch™ technology
 - CE Mark and SEMI S2-0703 compliant

Applications

- Accelerated EUV Optics Testing
- EUV Metrology
- EUV Resist Development
- Defect Inspection
- EUV Microscopy

Electrodeless Z-Pinch™ Technology

Z-pinch plasmas have been shown to be effective at producing EUV and SXR light. However, all the implementations to date have involved conducting high discharge currents into the plasma using electrodes. These electrodes, which are typically in contact with high temperature plasma, can melt and produce significant debris.

Energetiq's unique technology is also based on a Z-pinch plasma, but it avoids electrodes entirely by inductively coupling the current into the plasma. The plasma in the Energetiq source is magnetically confined away from the source walls, minimizing the heat load and reducing debris. Energetiq's Electrodeless Z-Pinch™ technology has excellent spatial stability, and stable repeatable power output.

Specifications

EUV Performance		
• Pulse Repetition Rate	10 kHz	
• Source Operating Pressure	150 mTorr typical	
• Xenon Flow Rate	100 sccm typical	
Physical Specifications EQ-10HR		
	System Dimensions (H x W x D)	Weight
• Source Rack	2002 x 611 x 915 mm (78.8 x 24.1 x 36.0 in)	440 kg (968 lbs)
• Instrument Rack	1356 x 611 x 915 mm (53.4 x 24.1 x 36.0 in)	215.5 kg (475 lbs)
• Modulator	498 x 356 x 701 mm (19.6 x 14.0 x 27.6 in)	54.4 kg (120 lbs)
• Source	810 x 697 x 769 mm (31.9 x 27.5 x 30.3 in)	98.4 kg (217 lbs)
• Fore Pump Assembly	643 x 259 x 460 mm (30.1 x 21.9 x 21.0 in)	27.7 kg (61 lbs)
Utility Requirements		
• Electrical	208V, 3Ø, 50/60 Hz, 30A	
• Cooling Water	40-60 PSID (0.28–0.41 MPa), 1.5 GPM (5.7 lpm) min., 30°C max. inlet	
• Clean Dry Air	80–100 PSIG (0.55–0.69 MPa)	
• Xenon	15–40 PSIG (0.10–0.28 MPa), 100 sccm max. (40 sccm typ.)	
Compliance		
• EQ-10 Series	CE Mark, SEMI S2-0703	

Patent Numbers: US 7,307,375; US 7,199,384; US 7,183,717; US 7,948,185; US 8,143,790; EP 2187711; Other patents applied for.

About Energetiq

Energetiq Technology, Inc. is a developer and manufacturer of advanced light sources that enable the analysis and manufacturer of nano-scale structures and products. The Energetiq team combines its deep understanding of the high power plasma physics needed for high-brightness light generation with its long experience in building rugged industrial & scientific products. The result is that users can expect the highest levels of performance combined with the highest reliability.



Energetiq Technology, Inc.
7 Constitution Way
Woburn, MA 01801

Phone: +1 781-939-0763
Fax: +1 781-939-0769
Email: info@energetiq.com
www.energetiq.com

Specifications are subject to change without notice.
EQ10HR—8/17

©2017 Energetiq Technology, Inc.
All rights reserved.